

Application

Model HCD-524 is a heavy duty industrial control damper with a flanged frame for high temperature applications. It is designed to control airflow and provide shut off in HVAC or industrial process control systems. A variety of optional features makes model HCD-524 extremely versatile, allowing its capabilities to be tailored to the application.

Damper Ratings

Velocity
Up to 5000 fpm (25.4 m/s)
Pressure
Up to 45 in. wg (11.2 kPa) - pressure differential
Temperature
-40°F to 1000°F (-40°C to 538°C). Consult factory for temperatures.

Construction

	Standard	Optional
Frame Depth	12 in. (305 mm)	
Frame Material	Painted	304SS 316SS
Frame Material Thickness	10 ga. (3.5 mm)	7 ga. (4.8 mm)
Frame Type	Flanged channel	
Flange Width (D)	2 in. (51 mm)	2½ in. (64 mm) 3 in. (76 mm)
Blade Material	Painted	304SS 316SS
Blade Thickness	10 ga. (3.5mm)	.188 in. (4.8 mm)
Blade Type	High Temp Airfoil	
Blade Action	Opposed	
Blade Seals	None	Fiberglass Ceramic
Linkage	Plated steel	304SS 316SS
Jamb Seals	None	Fiberglass Ceramic
Axle Diameter	1 in. (25 mm)	
Axle Bearings	Outboard Ball	Outboard Carbon
Axle Material	Plated steel	303SS 316SS
Axle Seals	Double Gland	Outboard Double Gland*
Paint Finishes	Hi Temperature Flame Control	None
Mounting Holes	None	Standard Standard with corner holes



The W dimension is ALWAYS parallel with the damper blade length. Damper linkage and axles may extend beyond the damper flange based on the configuration of selectable options. Consult factory for dimensions.

Size Limitations

W x H	Minimum Size	Maximum Size
		Single Section
Inches	6½ x 8	60 x 60
mm	165 x 203	1524 x 1524

Options Available:

- Wide range of actuators available
- Vertical Blade Orientation
- Bolt holes in flanges

*Outboard Double Gland assembly allowed for 3 in. of insulation.

Performance Data

Pressure Limitations

The chart at the right shows conservative pressure limitations based on a maximum blade deflection of $w/360$.

Temperature Limitations


Blade seals: Fiberglass -60° to 800°F (-51° to 427°C)
 Ceramic -60° to 1000°F (-51° to 538°C)

Jamb seals: Fiberglass -60° to 800°F (-51° to 427°C)
 Ceramic -60° to 1000°F (-51° to 538°C)

For higher temperatures, consult factory.

Velocity Limitations

The chart at far right shows velocity limitations based on damper size.

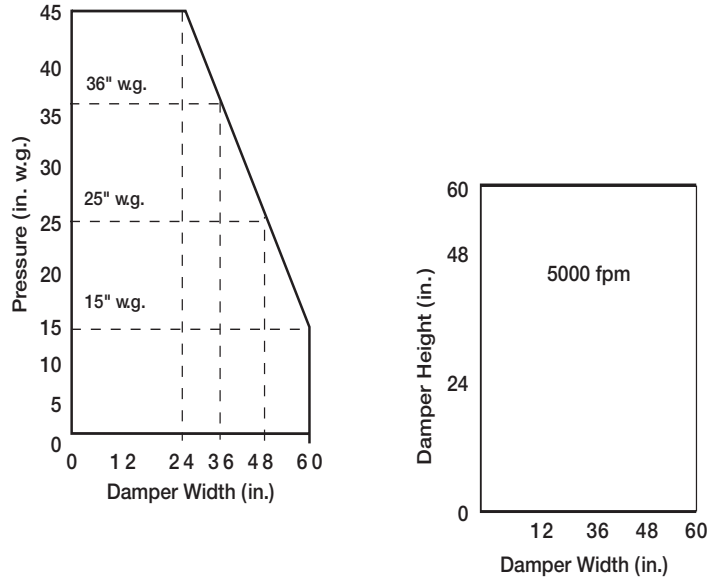

Pressure Drop Data

This pressure drop data was conducted in accordance with AMCA Standard 500-D using the three configurations shown. All data has been corrected to represent standard air at a density of .075 lb/ft³ (1.2 kg/m³).

Actual pressure drop found in any HVAC system is a combination of many factors. This pressure drop information along with an analysis of other system influences should be used to estimate actual pressure losses for a damper installed in a given HVAC system.

AMCA Test Figures

Figure 5.3 illustrates a fully ducted damper. This configuration has the lowest pressure drop of the three test configurations because the entrance and exit losses are minimized by straight duct runs upstream and downstream of the damper.

Figure 5.2 illustrates a ducted damper exhausting air into an open area. This configuration has a lower pressure drop than Figure 5.3 because the entrance losses are minimized by a straight duct run upstream of the damper.

Figure 5.5 illustrates a plenum mounted damper. This configuration has the highest pressure drop because of the high entrance and exit losses due to the sudden changes of area in the system.

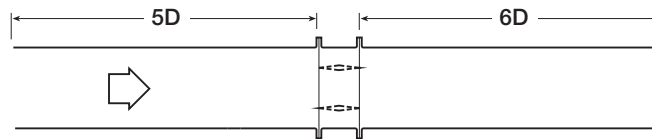


Fig. 5.3

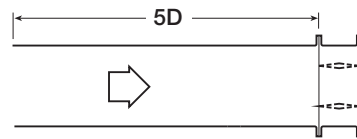


Fig. 5.2

$$D = \sqrt{\frac{4(W)(H)}{3.14}}$$


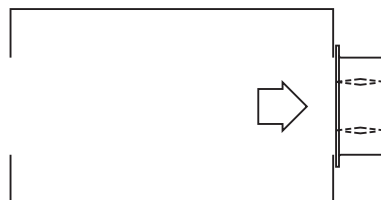


Fig. 5.5

Estimated Pressure Drop

36 in. x 36 in. Damper
(914mm x 914mm)

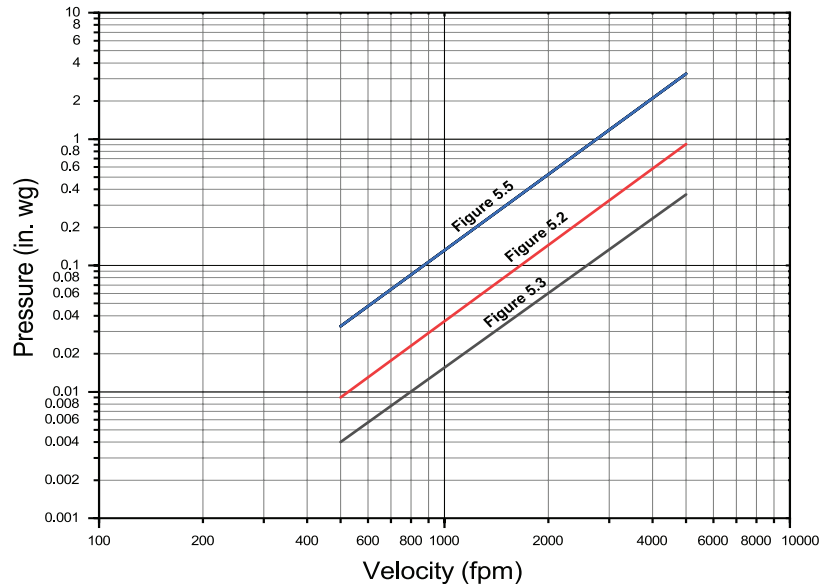


Leakage Data

Damper leakage (with blades fully closed) varies based on the type of low leakage seals applied. Model HCD-524 is available with no jamb and blade seals (standard) or with optional fiberglass or ceramic jamb and blade seals. Leakage testing was conducted in accordance with AMCA Standard 500-D and is expressed as CFM per sq. ft. of damper face area. All data has been corrected to represent standard air at a density of .075 lb/ft³ (1.2 kg/m³).


Estimated Leakage (with seals)

36 in. x 36 in. Damper
(914mm x 914mm)

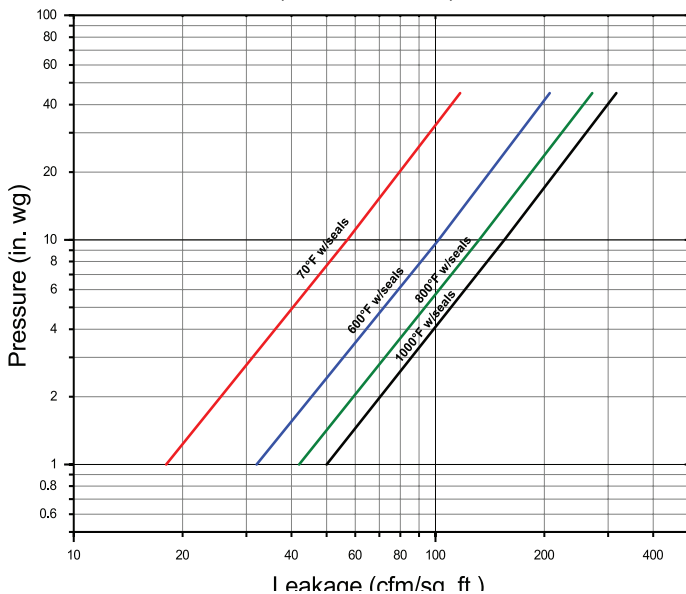


Estimated Leakage (without seals)

36 in. x 36 in. Damper
(914mm x 914mm)

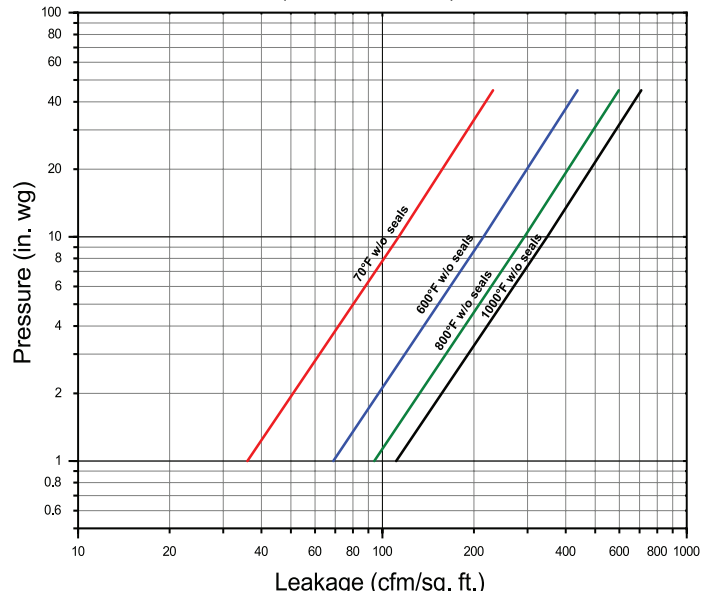


Bearings


Sleeve Bearing




O-Ring Shaft Seal




External Mounted Bronze Sleeve Bearing




O-Ring Shaft Seal with Outboard Mounted Bearing (Optional)



Double Gland Stuffing Box with Outboard Mounted Bearing (Optional)




Insulated Outboard Double Gland Stuffing Box with Outboard Mounted Bearing (Optional)*




*Allows for 3 in. of insulation.

Mounting Holes

Bolt holes are available as an option. The standard pattern is $\frac{7}{16}$ in. (11mm) diameter holes (M dimension) spaced 6 in. (152mm) on center (L dimension). Custom bolt hole patterns are available. Contact factory for the limitations.

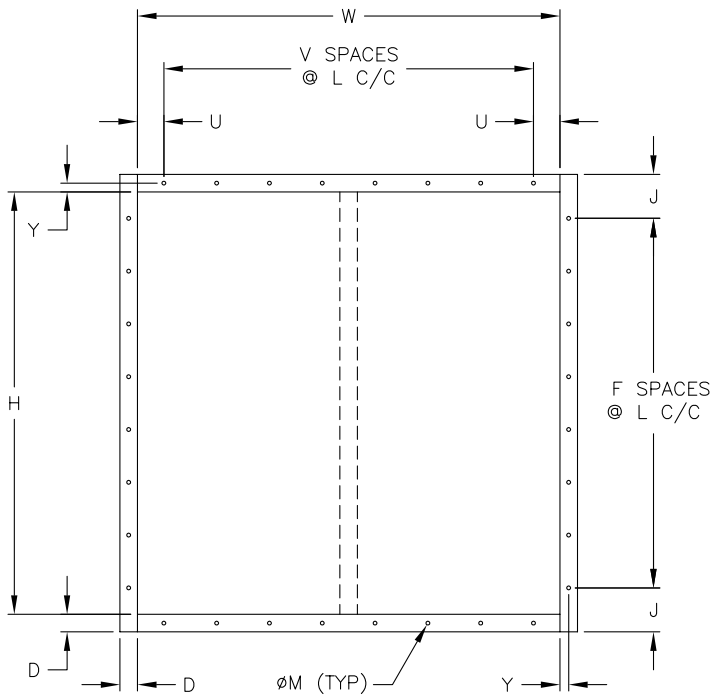

Standard Mounting Hole Pattern
Typical for single or double wide panel

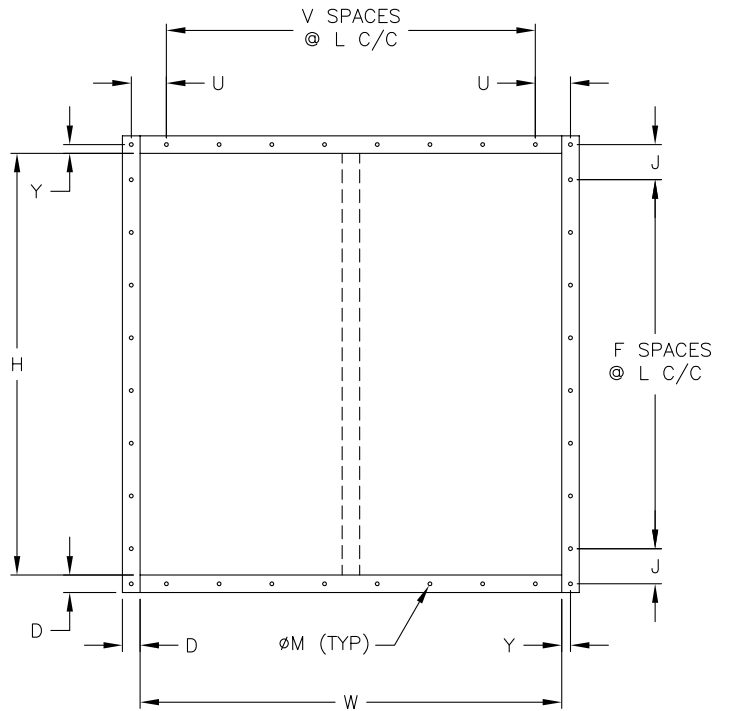

Standard Mounting Hole Pattern with Corner Holes
Typical for single or double wide panel

Links



[INSTALLATION](#)



[CATALOG](#)



[SELECTION GUIDE](#)



[HEAVY DUTY
SELECTION GUIDE](#)



[WARRANTY](#)